

CAT III Card-Sized Meter That Fits Your Pockets

Plus Powerful AutoCheck™
& EF-Detection Features!



CE

BM20 AutoCheck™
DMM Series

BRYMEN®

BRIGHT PEOPLE'S CHOICE
<http://www.brymen.com>



BM27



BM25




BM22



BM27	BM25	BM22	Functions & Features
6,000 Counts	6,000 Counts	4,000 Counts	Large Easy To Read LCD Display
5/Sec	5/Sec	3/Sec	Fast Data Measurement
600V	450V	600V	Input Protection On All Functions
•	•	•	Fully Auto-Ranging
•	•		AutoCheck™ Feature (Automatic DCV, ACV & Ohms Selection)
•	•		Electric Field EF-Detection (Non-Contact Voltage Detection)
•	•		Intelligent Auto Power Off -- Operation & Measurement Reset
		•	Standard Auto Power Off -- Operation Reset
		•	Data Hold
		•	30ms High Speed Max Hold
600V	450V		AutoCheck™ Lo-Z DCV & ACV Measurements (Auto-V Ω Position)
600V		600V	Standard Hi-Z DCV & ACV Measurements (V Position)
•	•		AutoCheck™ Ohms 6k Ω To 6M Ω , 4 Ranges (Auto-V Ω Position)
•			Ohms 600 Ω Range
•		•	Ohms 400 Ω To 40M Ω , 6 Ranges
•			Capacitance 100nF To 2000 μ F, 5 Ranges
	•		Capacitance 100nF To 100 μ F, 4 Ranges
		•	Capacitance 500nF To 3000 μ F, 5 Ranges
•	•	•	Audible Continuity
•		•	Diode Test
•			Micro-Amps AC/DC 400.0 μ A To 2000 μ A For Flame Sensors
•			Line-Voltage FREQUENCY With 3 Trigger Levels (V Position)
•	•		FREQUENCY 10Hz TO 30kHz (Auto-V Ω Position)
		•	FREQUENCY 5Hz TO 1MHz
•	•	•	Fire-Retarded Material Thick Wall Housing
•	•	•	Optional Purchase Protective Silicon Holster
•	•	•	EMC Meets EN61326, EN61000-4-2 & EN61000-4-3
•	•	•	Transient Protection Up To 4kV 1.2/50 μ s Lightning Surge
•		•	UL Listed To UL61010B-1 CAT III 300V & CAT II 600V AC/DC
	•		UL Listed To UL61010B-1 CAT III 300V & CAT II 450V AC/DC

A Really Smart & Handy Tool

Having Patented Functions & Features To Meet Your Daily Application Need

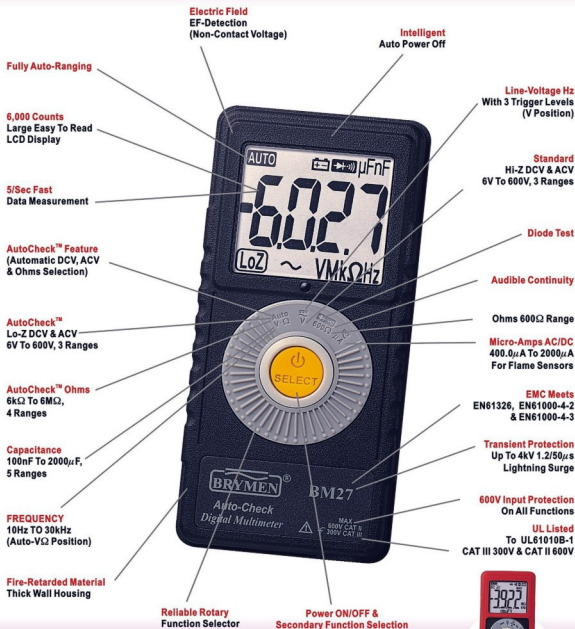

Optional Purchase Protective Silicon Holster



